

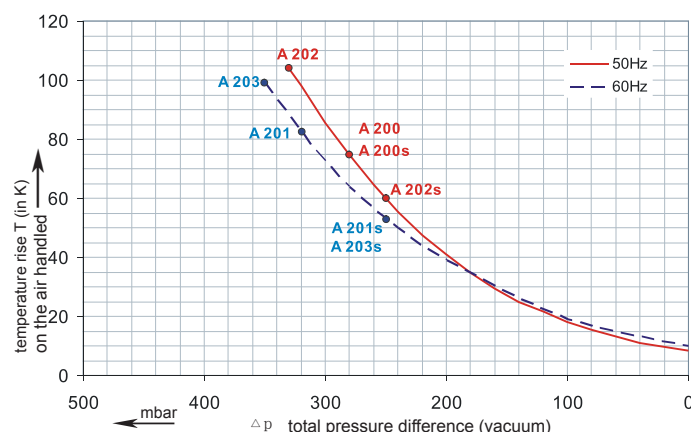


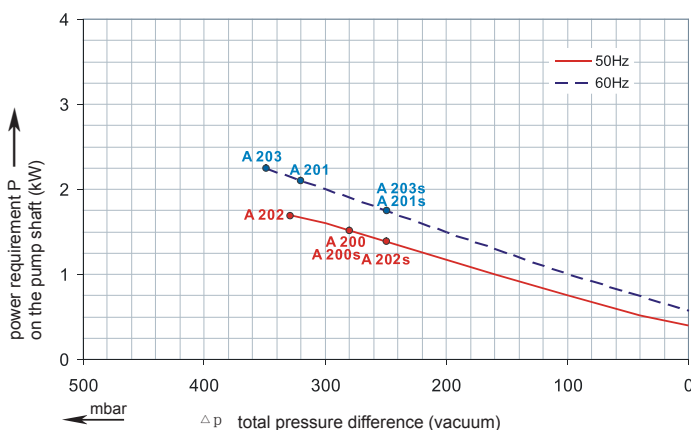




G-2RB

Performance curve for Vacuum pump

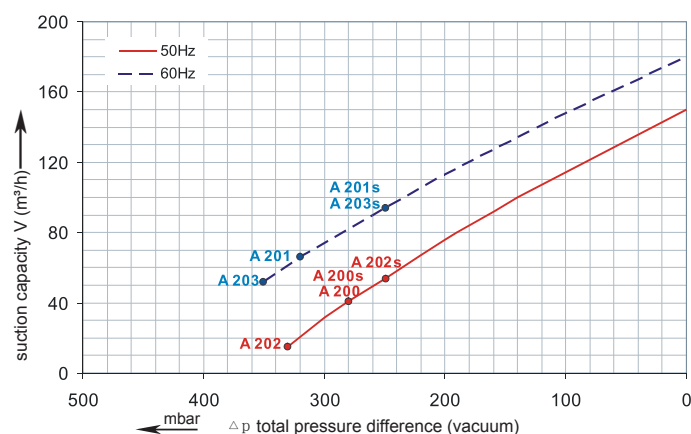

2RB 420


Performance curve for Compressor

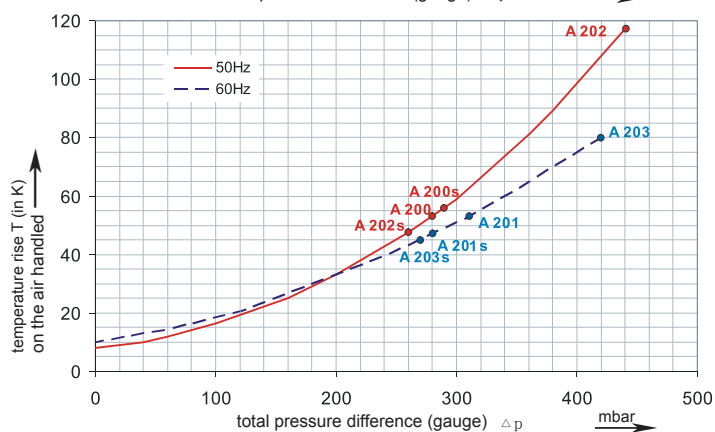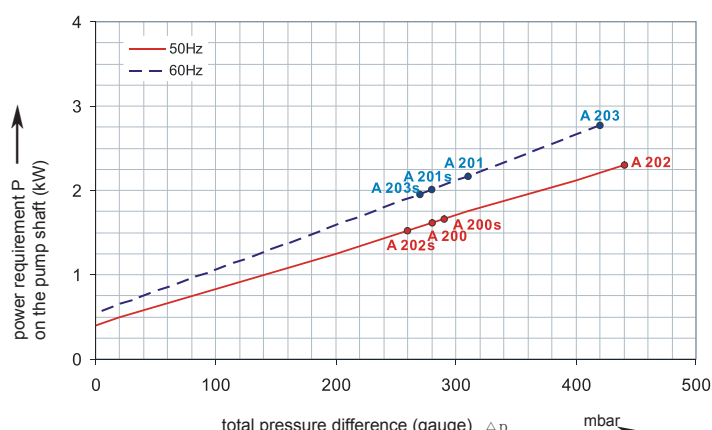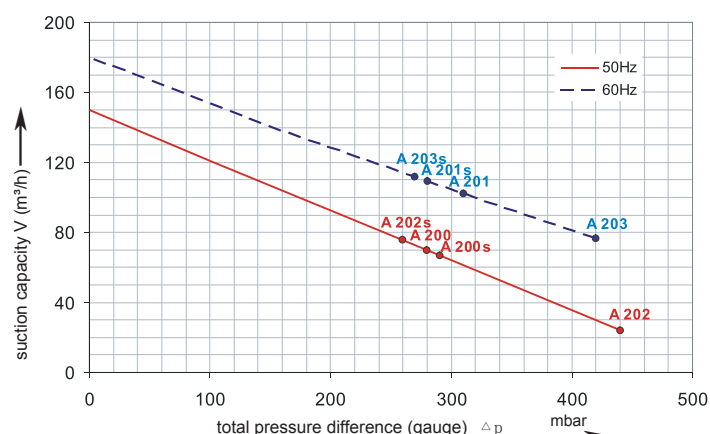

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of +/- 10 %.
The total pressure differences are valid for suction and ambient temperatures up to 25 °C.
For other conditions please confer with us.

Each G-2RB type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. The motors are available as standard for the input voltage range of 50 and 60 Hz and for protection category IP 55 as well as approved for UL and CSA.

2RB420 Dimensions

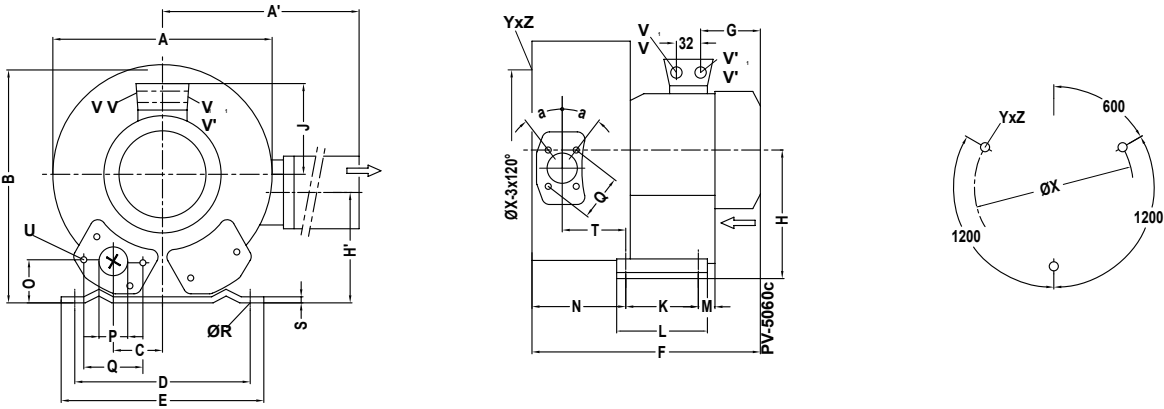

Type	Phases																					X-Bohrungen									
		A	A'	B	C	D	E	F	G	H	H'	J	K	L	M	N	O	P	Q	ØR	S	T	U	V ₍₁₋₎	V ₍₁₋₎	V ₍₂₋₎	V ₍₂₋₎	α	ØX	YxZ	X-Holes
2RB 420-7HH36	3 ~	322	324	315	58	225	255	401	191	154	153	128	95	130	73	151	45	G1½(15tef-deep)	72	12	3	104	M6x19	-	-	M25x1.5	M16x1.5	28°	174	M6x15	51°171°/291°
2RB 420-7HH46	3 ~	322	324	315	58	225	255	401	191	154	153	128	95	130	73	151	45	G1½(15tef-deep)	72	12	3	104	M6x19	-	-	M25x1.5	M16x1.5	28°	174	M6x15	51°171°/291°
2RB 420-7HA31	1 ~	322	324	315	58	225	255	401	191	154	153	128	95	130	73	151	45	G1½(15tef-deep)	72	12	3	104	M6x19	M16x1.5	M25x1.5	-	-	28°	174	M6x15	51°171°/291°
2RB 420-7 AV45	1 ~	322	324	315	58	225	255	401	191	154	153	128	95	130	73	151	45	G1½(15tef-deep)	72	12	3	104	M6x19	M16x1.5	M25x1.5	-	-	28°	174	M6x15	51°171°/291°



Selection and ordering data

Type 2RB420

Curve No.	Order No.	Fre- quency	Rated power	Input voltage	Input current	Permissible total differential pressure ²⁾		Sound pressure level ³⁾	Weight ca.
		Hz	kW	V	A	Vacuum mbar	Compressor mbar	dB(A)	kg

3~ 50/60 Hz IP55 isolation material class F 1)

A 200	2RB420-7HH36	50	1.6	200D ... 240D	345Y...415Y	8.5D	4.3Y	-280	280	66	25
A 201	2RB420-7HH36	60	2.05	220D ... 275D	380Y...480Y	7.6D	4.4Y	-320	310	69	25
A 202	2RB420-7HH46	50	2.2	200D ... 240D	345Y...415Y	9.7D	5.6Y	-330	440	66	27
A 203	2RB420-7HH46	60	2.55	220D ... 275D	380Y...480Y	10.0D	5.8Y	-350	420	69	27

1~ 50/60 Hz IP55 with attached condenser for continuous operation

A 200s	2RB420-7HA31	50	1.5	230		9		-280	290	66	26
A 201s	2RB420-7HA31	60	1.75	230		10		-250	280	69	26
A 202s	2RB420-7AV45	50	1.5	115	230	22	11	-250	260	66	27
A 203s	2RB420-7AV45	60	1.75	115	230	24	12	-250	270	69	27



Other voltage ranges

		☐ ☐
50Hz	60Hz	↑ ↑
3~		
185...225 V D/320...390 V Y	200...240 V D/345...415 V Y	H 1
200...240 V D/345...415 V Y	200...275 V D/380...480 V Y	H 6
345...415 V D	380...480 V D	H 1
500 V D	575VD	C 5
Machines according to the ATEX norm 94/4 EG are available for the whole performance range.		
Following types available: Category 3 G, 3/2 G, 3 D and 3/2 D.		
1~		
100 / 200 V	100 / 200 V	V 4
115 / 230 V	115 / 230 V	V 5
230V	---	A 1

Further voltage range on request; please quote in plain text.

All G-2RB achieve the standards and norms of the low voltage directive (LVD)2006/95/EC, rotating electrotechnical motor EN 60034-1-2004, electromagnetic compatibility(EMC)EN55014-1/2, EN61000-2/-3/-4/-6.

- 1) For standard UL for ELECTRIC MOTOR UL 1004-1.
- 2) Relief-valve are available for limiting differential pressure.
- 3) Measuring-surface sound-pressure level acc. to DIN EN 21680, measured at a distance of 1 m. The pump is throttled to an average suction pressure, a hose is connected to the discharge side (compressor) / suction side (vacuum pump), but is not fitted with relief valves.

The motors are designed according to the DIN EN 60 034 / DIN IEC 34-1 and temperature class F.

For the three phase machines the tolerances are +/- 10 % for fixed voltage and +/- 5 % for voltage range.

The single phase machines are designed with a +/- 5 % tolerances. If only 90 % of the maximum allowed pressure will be used for the continuous operating then the allowed voltage range add to +/- 10 %.

For all single and three phase machines which designed according to the UL and CSA norm (UL 1004-1) the maximum allowed voltage tolerances are - 10 % resp. + 6 %.

The frequency tolerance is maximum +/- 2 %.

Changes in particular the quoted performance curve, datas and weights without prior notice. The figures are without obligations.

ZHEJIANG GREENCO INDUSTRY CO.,LTD

Add:danya industrial zone.zeguo.wenling zhejiang China
P.C:317523
Tel:0086-576-86428999
Fax:0086-576-86409555
E-mail:greenco@greenco.cn
Http://www.greenco.cn