

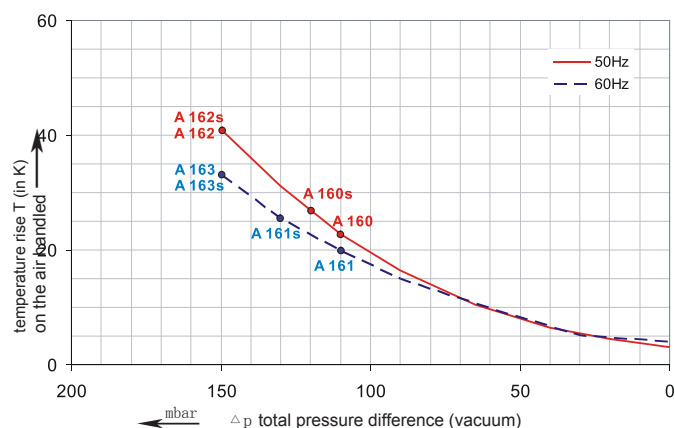


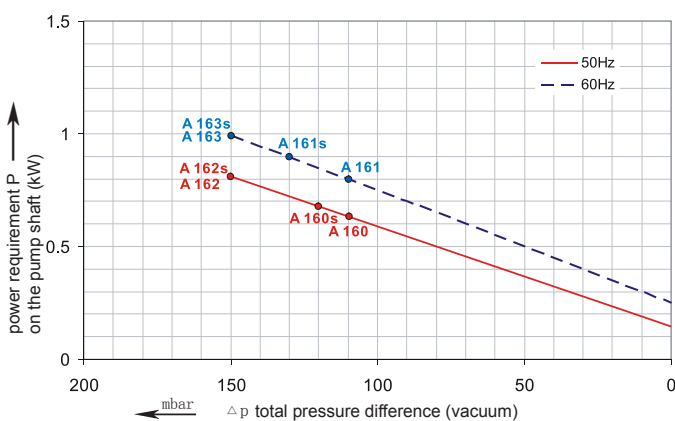




G-2RB

Performance curve for Vacuum pump

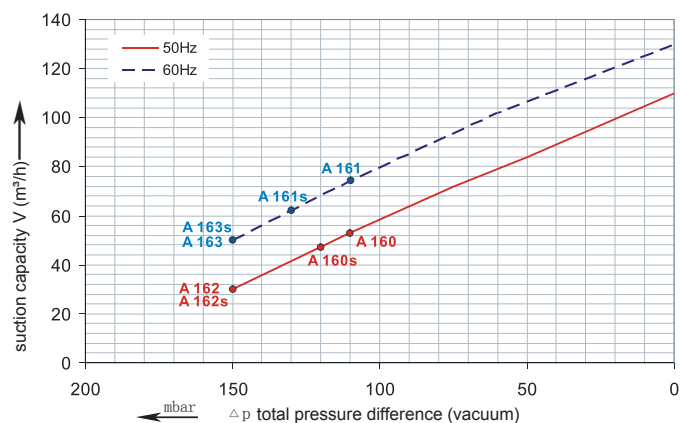

2RB 310


Performance curve for Compressor

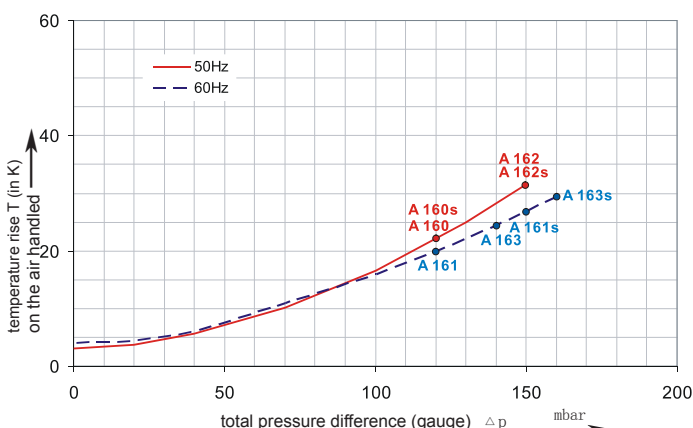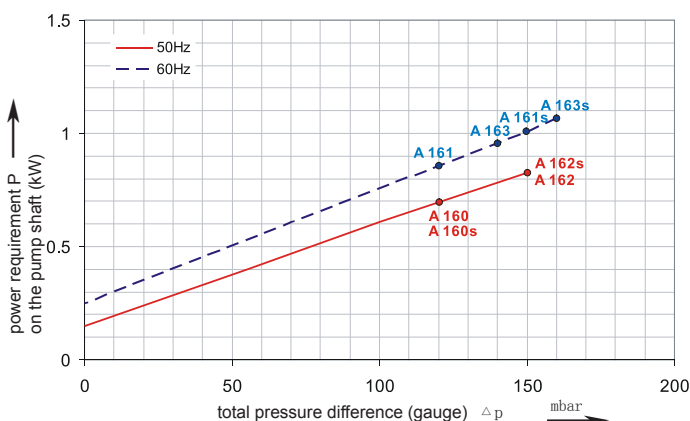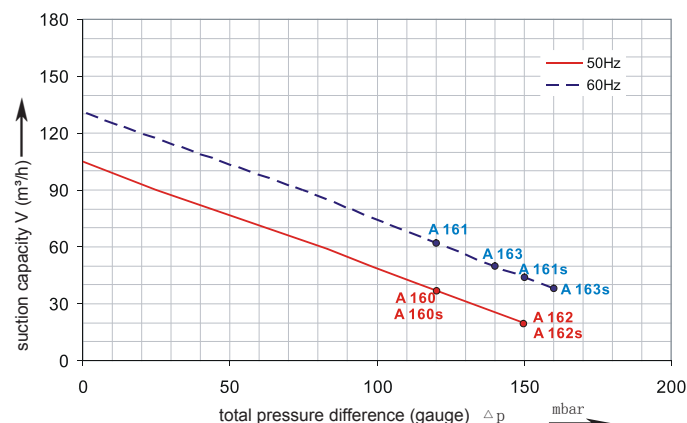


The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of +/- 10 %.
The total pressure differences are valid for suction and ambient temperatures up to 25 °C.
For other conditions please confer with us.

Each G-2RB type can be applied both as vacuum pump and compressor in continuous operation over the total stated performance curve range. The motors are available as standard for the input voltage range of 50 and 60 Hz and for protection category IP 55 as well as approbated for UL and CSA.

2RB310 Dimensions

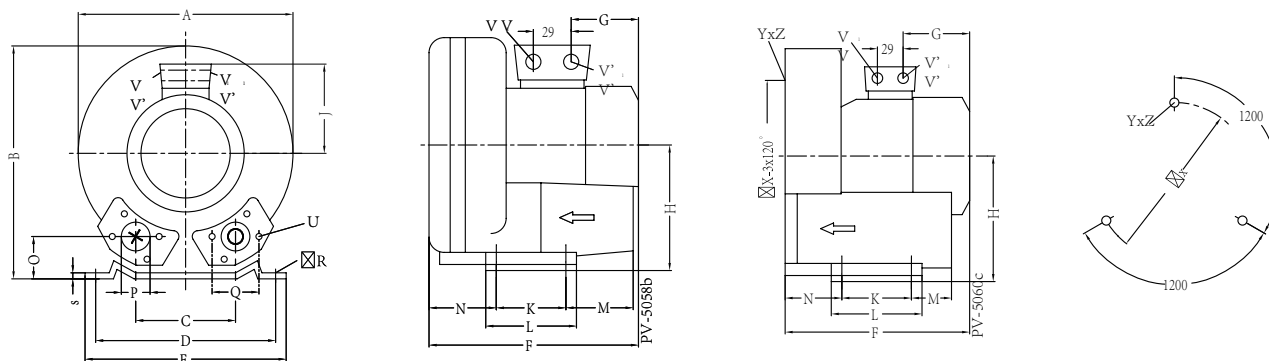

Type	Phases																				X-Borungen X-Holes				ØX		
		A	B	C	D	E	F	G	H	J	K	L	M	N	O	P	Q	ØR	S	U	Vn-1	Vn-3	Vn-3	YxZ			
2RB 310-7AH06	3~	268	272	93	205	230	260	135	141	111	83	108	82	69	41	G11q(15ft#-deep)	64	10	2.5	M6x17	-	-	M25x1.5	M16x1.5	M6x15	0°/120°/240°	160
2RB 310-7AH16	3~	268	272	93	205	230	260	135	141	111	83	108	82	69	41	G11q(15ft#-deep)	64	10	2.5	M6x17	-	-	M25x1.5	M16x1.5	M6x15	0°/120°/240°	160
2RB 310-7AA01	1~	268	272	93	205	230	260	135	141	111	83	108	82	69	41	G11q(15ft#-deep)	64	10	2.5	M6x17	M25x1.5	M16x1.5	-	-	M6x15	0°/120°/240°	160
2RB 310-7AA 11	1~	268	272	93	205	230	260	135	141	111	83	108	82	69	41	G11q(15ft#-deep)	64	10	2.5	M6x17	M16x1.5	M25x1.5	-	-	M6x15	0°/120°/240°	160

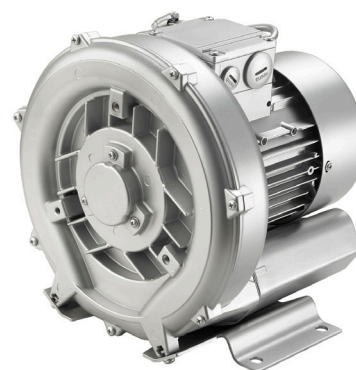

Selection and ordering data

Type 2RB310

Curve No.	Order No.	Fre-quency	Rated power	Input voltage	Input current	Permissible total differential pressure ²⁾		Sound pressure level ³⁾	Weight ca.
		Hz	kW	V	A	Vacuum mbar	Compressor mbar	dB(A)	kg

3~ 50/60 Hz IP55 isolation material class F 1)

A 160	2RB310-7AH06	50	0.55	200D ... 240D	345Y...415Y	2.8D	1.2Y	-110	120	55	11
A 161	2RB310-7AH06	60	0.63	220D ... 275D	380Y...480Y	3.0D	1.0Y	-110	120	57	11
A 162	2RB310-7AH16	50	0.75	200D ... 240D	345Y...415Y	3.8D	1.5Y	-150	150	55	12
A 163	2RB310-7AH16	60	0.83	220D ... 275D	380Y...480Y	3.8D	1.5Y	-150	140	57	12

1~ 50/60 Hz IP55 with attached condenser for continuous operation

A 160s	2RB310-7AA01	50	0.55	230		3.7		-120	120	55	13
A 161s	2RB310-7AA01	60	0.62	230		4.5		-130	150	57	13
A 162s	2RB310-7AA11	50	0.7	230		4.8		-150	150	55	14
A 163s	2RB310-7AA11	60	0.8	230		4.1		-150	160	57	14



Other voltage ranges

2RB310-7A □ □		
50Hz	60Hz	↑ ↑
3~		
185...225 V D/320...390 V Y	200...240 V D/345...415 V Y	H 1
200...240 V D/345...415 V Y	200...275 V D/380...480 V Y	H 6
345...415 V D	380...480 V D	H 1
500 V D	575VD	C 5
Machines according to the ATEX norm 94/4 EG are available for the whole performance range. Following types available: Category 3 G, 3/2 G, 3 D and 3/2 D.		
1~		
230 V	230 V	A 1
Further voltage range on request; please quote in plain text.		

All G-2RB achieve the standards and norms of the low voltage directive (LVD)2006/95/EC, rotating electrotechnical motor EN 60034-1-2004, electromagnetic compatibility(EMC)EN55014-1/2,EN61000-2/-3/-4/-6.

- 1) For standard UL for ELECTRIC MOTOR UL 1004-1.
- 2) Relief-valve are available for limiting differential pressure.
- 3) Measuring-surface sound-pressure level acc. to DIN EN 21680, measured at a distance of 1 m. The pump is throttled to an average suction pressure, a hose is connected to the discharge side (compressor) / suction side (vacuum pump), but is not fitted with relief valves.

The motors are designed according to the DIN EN 60 034 / DIN IEC 34-1 and temperature class F.

For the three phase machines the tolerances are +/- 10 % for fixed voltage and +/- 5 % for voltage range.

The single phase machines are designed with a +/- 5 % tolerances. If only 90 % of the maxium allowed pressure will be used for the continuousoperating then the allowed voltage range add to +/- 10 %.

For all single and three phase machines which designed according to the UL and CSA norm (UL 1004-1) the maximum allowed voltage tolerances are - 10 % resp. + 6 %.

The frequency tolerance is maximum +/- 2 %.

Changes in particular the quoted performance curve, datas and weights without prior notice. The figures are without obligations.

ZHEJIANG GREENCO INDUSTRY CO.,LTD

Add:danya industrial zone.zeguo.wenling zhejiang China
P.C:317523
Tel:0086-576-86428999
Fax:0086-576-86409555
E-mail:greenco@greenco.cn
Http://www.greenco.cn